



**VG9000 系列法兰连接二通及三通混流阀门, DN15-DN100, 铸铁, PN 6 (K) & PN 10 (L)**  
 介质温度: 2 ... 140 °C

**阀门及电动执行器**

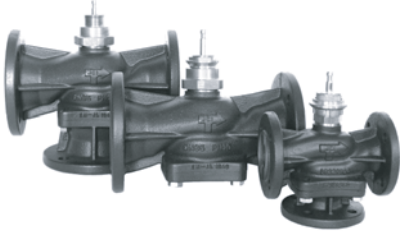

VG9000 系列阀门



尺寸 (mm)

尺寸

PN 6								PN 10							
DN	B	D1	D2	D3	d	H1	孔数	B	D1	D2	D3	d	H1	孔数	
15	130	80	55	38	11	65	4	130	95	65	46	14	65	4	
20	140	90	65	48	11	70	4	150	105	75	56	14	75	4	
25	150	100	75	58	11	75	4	160	115	85	65	14	80	4	
40	180	130	100	78	14	90	4	200	150	110	84	19	100	4	
50	200	140	110	88	14	100	4	230	165	125	99	19	115	4	
65	240	160	130	108	14	120	4	230	185	145	118	19	145	4	
80	260	190	150	124	19	130	4	310	200	160	132	19	155	8	
100	300	210	170	144	19	150	4	350	220	180	156	19	175	8	

DN 15-100, PN 6, VG9000 系列法兰连接阀门选型表

尺寸 DN	Kvs	行程	最大关闭力 kPa				型号
			VA-7700-820x 500 N	VA7810-xxx-12 1000 N	RA-3000-712x 1600 N	RA-3000-732x 3000 N	
15	0.63	8 mm	600	600	-	-	VG94A5S1K
15	1.0	8 mm	600	600	-	-	VG94A4S1K
15	1.6	8 mm	600	600	-	-	VG94A3S1K
15	2.5	8 mm	600	600	-	-	VG94A2S1K
15	4.0	8 mm	600	600	-	-	VG94A1S1K
20	6.3	13 mm	590	480	-	-	VG94B1S1K
25	10	13 mm	360	480	-	-	VG94C1S1K
32	16	19 mm	190	290	-	-	VG94D1S1K
40	25	19 mm	100	290	-	-	VG94E1S1K
50	40	19 mm	100	290	-	-	VG94F1S1K
65	63	25 mm	-	150	380	-	VG94G1S1K
80	100	25 mm	-	-	-	510	VG94H1S1K
100	160	25 mm	-	-	-	320	VG94J1S1K

二通常闭阀(PDTO)

尺寸 DN	Kvs	行程	VA-7700-820x 500 N	VA7810-xxx-12 1000 N	RA-3000-712x 1600 N	RA-3000-732x 3000 N	型号
15	0.63	8 mm	600	600	-	-	VG94A5S1K
15	1.0						VG94A4S1K
15	1.6						VG94A3S1K
15	2.5						VG94A2S1K
15	4.0						VG94A1S1K
20	6.3	13 mm	590	480	-	-	VG94B1S1K
25	10						VG94C1S1K
32	16						VG94D1S1K
40	25						VG94E1S1K
50	40	19 mm	100	290	-	-	VG94F1S1K
65	63						VG94G1S1K
80	100	25 mm	-	-	-	510	VG94H1S1K
100	160						VG94J1S1K

三通混流阀

尺寸 DN	Kvs	行程	VA-7700-820x 500 N	VA7810-xxx-12 1000 N	RA-3000-712x 1600 N	RA-3000-732x 3000 N	型号
15	0.63	8 mm	600	600	-	-	VG98A5S1K
15	1.0						VG98A4S1K
15	1.6						VG98A3S1K
15	2.5						VG98A2S1K
15	4.0						VG98A1S1K
20	6.3	13 mm	490	440	-	-	VG98B1S1K
25	10						VG98C1S1K
32	16						VG98D1S1K
40	25						VG98E1S1K
50	40	19 mm	60	260	-	-	VG98F1S1K
65	63						VG98G1S1K
80	100	25 mm	-	-	-	500	VG98H1S1K
100	160						VG98J1S1K



**VG9000** 系列法兰连接二通及三通混流阀门, DN15-DN100, 铸铁, PN 6(K) & PN 10(L)。  
 介质温度: 2 ... 140 °C (续)

## 阀门及电动执行器

DN 15-100, PN 10, VG9000系列法兰连接阀门选型表

尺寸 DN	Kvs	行程	最大关闭力 kPa				型号
			VA-7700-820x 500 N	VA7810-xxx-12 1000 N	RA-3000-712x 1600 N	RA-3000-732x 3000 N	

### 二通常闭阀(PDTC)

15	0.63	8 mm	1000	1000	-	-	VG94A5S1L
	1.0						VG94A4S1L
	1.6						VG94A3S1L
	2.5						VG94A2S1L
	4.0						VG94A1S1L
20	6.3	13 mm	980	-	-	VG94B1S1L	
25	10	640	VG94C1S1L				
32	16	400	900			VG94D1S1L	
40	25	210	510			VG94E1S1L	
50	40	110	310			VG94F1S1L	
65	63	25 mm	-	160	390	VG94G1S1L	
80	100			-	-	510	VG94H1S1L
100	160			-	-	320	VG94J1S1L

### 三通混流阀

15	0.63	8 mm	1000	1000	-	-	VG98A5S1L
	1.0						VG98A4S1L
	1.6						VG98A3S1L
	2.5						VG98A2S1L
	4.0						VG98A1S1L
20	6.3	13 mm	880	-	-	VG98B1S1L	
25	10	430	VG98C1S1L				
32	16	240	790			VG98D1S1L	
40	25	110	420			VG98E1S1L	
50	40	40	240			VG98F1S1L	
65	63	25 mm	-	120	360	VG98G1S1L	
80	100			-	-	490	VG98H1S1L
100	160			-	-	310	VG98J1S1L